

Product
Catalogue '23

CENSUS

WOODEN SERIES



M O D E R N I T Y


600x1200mm | *5mm Thickness*

Discover charming tiles for beautiful spaces

Transform your spaces with our surfaces, designed to uplift your interiors. Embrace the beauty of our meticulously curated collection, crafted to add a touch of elegance to your home.

Elevate your living spaces with our exceptional range of tiles, where every step inspires beauty and creativity. Explore the endless possibilities and create a haven of beauty in your abode. Experience the joy of well-crafted surfaces that reflect your personality and vision. Welcome to a world of beautiful tiles that redefine the art of living.


Product Features




Light Weight




Easy Install



Flat Surface




Bending
Strength




Easy Drilling



Resistant to
Traffic Wear



Chemicals
Resistance



Easy
Cleaning

CENSUS



**ANGOLA
WOOD**

**FINISH
RUSTIC MATT**

**BODY IVORY
RANDOM 01**



**SIZE
600X1200MM**

**THICKNESS
5MM**

CENSUS



**MARKS
WOOD**

**FINISH
RUSTIC MATT**


**BODY IVORY
RANDOM 01**



**SIZE
600X1200MM**

**THICKNESS
5MM**

CENSUS

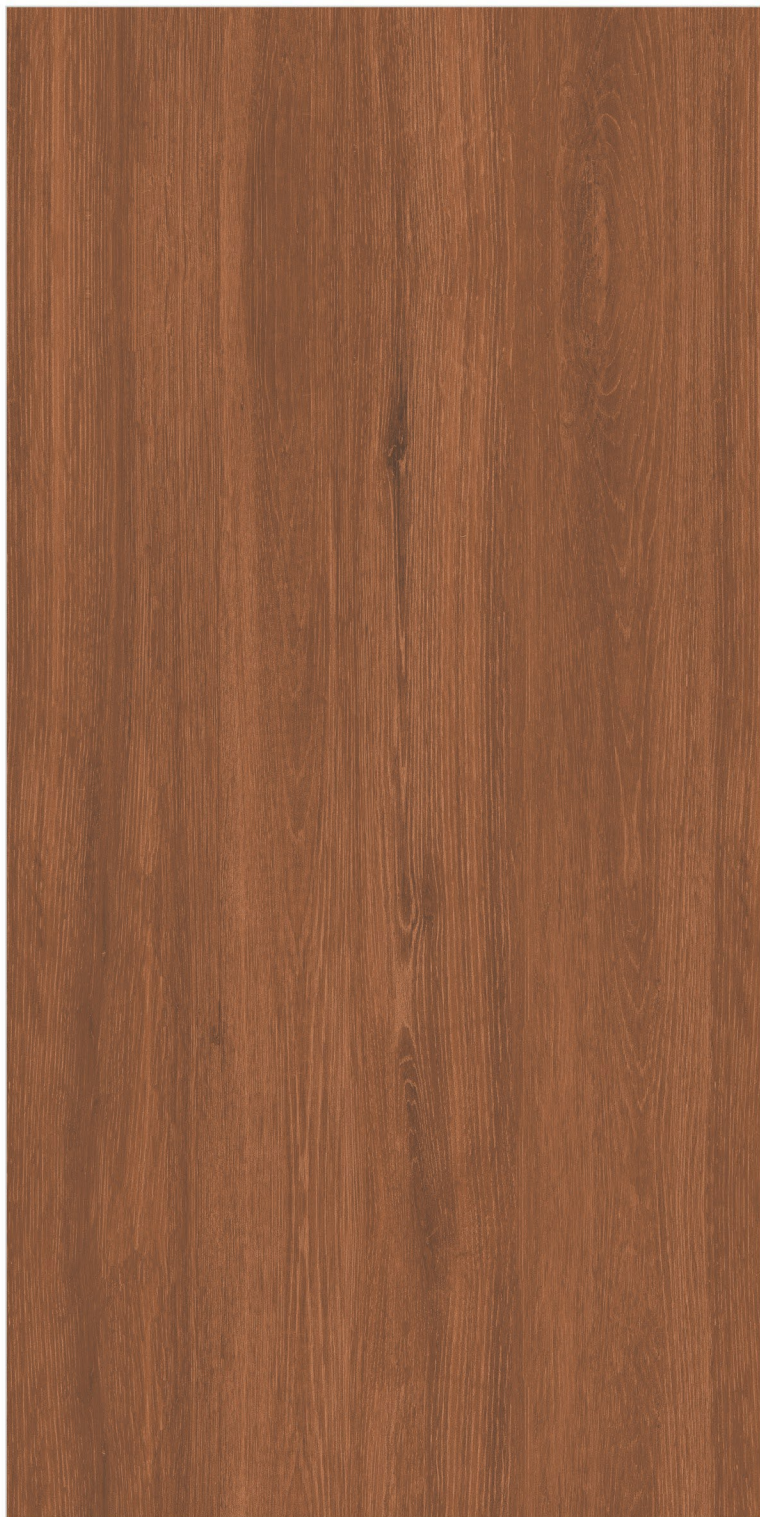

**NATURAL
TEAK**

**FINISH
RUSTIC MATT**

**BODY IVORY
RANDOM 01**



**SIZE
600X1200MM**

**THICKNESS
5MM**

CENSUS

**PINE
WOOD RUST**

**FINISH
RUSTIC MATT**

**BODY IVORY
RANDOM 04**



**SIZE
600X1200MM**

**THICKNESS
5MM**

TECHNICAL SPECIFICATION

| DIMENSION & SURFACE QUALITY | STANDARD AS PER ISO13006 En14411 Gr.BIa | OUR MEAN VALUE | METHOD OF TESTING |
|-------------------------------|---|----------------|-------------------|
| Deviation in Length and Width | ± 0.5 % | ± 0.1 % | ISO 10545-2 |
| Deviation in Thickness | ± 0.5 % | ± 4.0 % | ISO 10545-2 |
| Straightness in Side | ± 0.5 % | ± 0.1 % | ISO 10545-2 |
| Rectangularity | ± 0.5 % | ± 0.1 % | ISO 10545-2 |
| Surface Flatness | ± 0.5 % | ± 0.1 % | ISO 10545-2 |
| Color Difference | Unaltered | No Change | ISO 10545-2 |

STRUCTURAL PROPERTIES

| | | | |
|------------------|------------|-------------|-------------|
| Water Absorption | ≤ 0.5 % | ≤ 0.1 % | ISO 10545-3 |
| Apparent Density | > 2.0 g/cc | > 2.20 g/cc | DIN 51082 |

SURFACE MECHANICAL PROPERTIES

| | | | |
|------------------|-------------|----------------|-------------|
| Surface Abrasion | As per mfg. | Min. Class - 4 | ISO 10545-7 |
| MOH's Hardness | As per mfg. | Min. 7 | EN 101 |

THERMO HYGROMETRIC PROPERTIES

| | | | |
|--------------------------------|---------------------------|---------------------------|--------------|
| Frost Resistance | No Damage | No Damage | ISO 10545-12 |
| Thermal Shock Resistance | No Damage | No Damage | ISO 10545-9 |
| Moisture Expansion | Nil | Nil | ISO 10545-10 |
| Linear Thermal Expansion (CEO) | Max. 9.0x10 ⁻⁶ | Max. 6.5x10 ⁻⁶ | ISO 10545-8 |

CHEMICAL PROPERTIES

| | | | |
|-----------------------------|-----------|------------|--------------|
| Chemical Resistance | No Damage | | ISO 10545-13 |
| Cleaning Products | No Damage | UA | ISO 10545-13 |
| Pool Salts | No Damage | UA | ISO 10545-13 |
| Weak Concentration | No Damage | ULA | ISO 10545-13 |
| High Concentration | No Damage | UHA | ISO 10545-13 |
| Release of Lead and Cadmium | No Damage | No Release | ISO 10545-15 |
| Stain Resistance | Resistant | Class - 4 | ISO 10545-14 |

SEFTY PROPERTIES

| | | | |
|-----------------|-------------|--|-----------|
| Fire Resistance | As per mfg. | Class A1 FL (Flooring) Class A1 (Wall) | EN 13501 |
| Skid Resistance | As per mfg. | > R9 | DIN-51130 |

MASSIVE MECHANICAL PROPERTY

| TEST | TESTING METHOD AND ISO VALUE | DETERMINATION | UNIT | OUR VALUE |
|--------------------|------------------------------|----------------------------|-------------------|-----------|
| Bending Resistance | ISO-10545-4 | Breaking Strength | N | 700 |
| | | Modulus of Rupture | N/mm ² | 40 |
| Impact Test | ISO-10545-5 | Coefficient of Restitution | - | 0.6 |

PACKAGING DETAILS

| Dimensions | No. of Pcs/Box | Square Feet | Weight (Approx) |
|------------|----------------|-------------|-----------------|
| 600x1200mm | 4 Pcs. | 31 Sq. Ft. | 32.5 Kgs |

